

FLEXIBLE CONVEYOR ACCESSORIES

ConveyX Corp. (CXC) offers a variety of options and accessories to support the Powered Flex and Gravity Flex Conveyor products for material handling applications. These options and accessories assist in the safe movement, storage, and operation for both the equipment and worker.

POWER ASSIST

The Power Assist is an economical option to ease the movement of Powered Flex Conveyors in and out of trailers, reposition for convenient access or return to a storage location.

Features:

- Utilizes a single point of contact to maximize maneuverability of the conveyor
- Simple forward/reverse controls
- Bolted and welded construction for ease of installation, maintenance, and durability
- Works with ConveyX Powered Flex or Gravity Impact Carts
- Integrated with a Powered Flex Conveyor for seamless controls and operation
- Can be attached/detached from Powered Flex Conveyor to service multiple conveyors and dock doors (optional and tools required)



IMPACT CART

Protect the Flex Conveyor with an impact cart at the infeed end. Heavy boxes dropped repeatedly on the conveyor can damage rollers, sensors and drive components. The Impact Cart is ideal for package loading and moves packages along to the Flex Conveyor with a gentle push. The Impact Cart can reduce costly conveyor maintenance and down-time.

Features:

- Welded construction and 2 1/2" diameter rollers to resist damage from impact loading
- Bolted connection for semi-permanent installation or hook connection for rapid attach/detach




FLOOR GUIDE

Move the Flex Conveyor in and out of storage with ease using the Floor Guide.

Features:

- Welded tube construction and modular installation
- Formed, rounded nose (front) for easy return
- Reinforced back stop

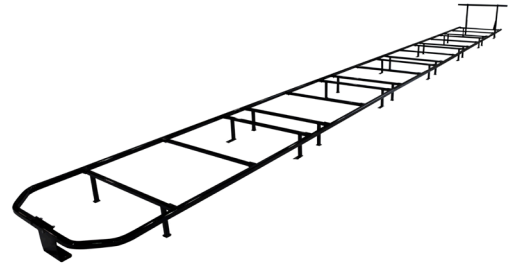

TRANSITION

Transitions, offered in straight and centering configurations, assist flow from the feed line to the Flex Conveyor. The Centering Transition aligns packages toward the center of the Flex Conveyor.

Features:

- Reduces impact during transition from feed conveyors to the Flex Conveyor
- Pivoting cleat section to enhance final transition
- The centering configuration directs products toward the middle of the conveying lane.
- Bolt-on, formed angle sideguides are available



SIDE GUIDES

Flexible Side Guides prevent packages from falling off the edges of the conveyor.

Features:

- Curves, flexes, expands and collapses with the flex conveyor
- Durable, UHMW material
- 4" overall height, extends 3" above and 1" below the top of roller
- Mounts utilizing existing handle locations

